
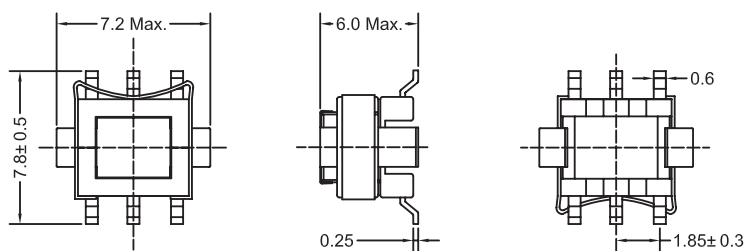



Current transformer/電流互感器

	<p>Core shape: EE-5 Features:</p> <ul style="list-style-type: none"> •Designed with the high permeability ferrite core •Different turn ratio •Low DC resistance •Surface-Mounted •RoHS Compliance 	<p>磁芯形狀: EE-5 特性:</p> <ul style="list-style-type: none"> •採用高初始磁導率磁芯設計 •各種不同的圈數比例 •直流阻抗小 •封裝形式: 表面安裝 •符合RoHS標準
---	--	---


Shape and external dimension/機械尺寸mm.



Blister tape packing/水泡帶包裝 Unit:mm

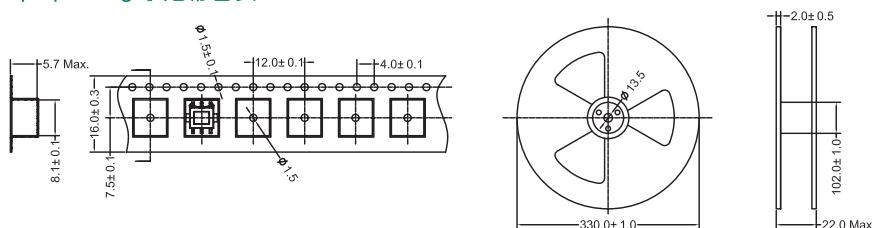

Typical application/典型應用

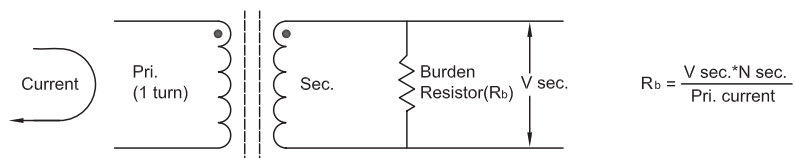

Electronical characteristics/電氣特性

Model/型號	Turn ratio $N_p : N_s$	Inductance Sec. @1KHz/50mv (uH)	DCR(mΩ) (Max.)	Voltage-time V.us	Burden Resistance. $R_b \Omega$
GBCT-1:20-S	1:20	81	400	10.8	2.0
GBCT-1:30-S	1:30	180	870	16.2	3.0
GBCT-1:40-S	1:40	320	1140	21.6	4.0
GBCT-1:50-S	1:50	500	1500	27.0	5.0
GBCT-1:60-S	1:60	730	1980	32.4	6.0
GBCT-1:70-S	1:70	980	3000	37.8	7.0
GBCT-1:100-S	1:100	2000	5500	54.0	10.0
GBCT-1:125-S	1:125	3000	6500	67.5	12.5